


ISS ZONE	REVISION
	DESCRIPTION

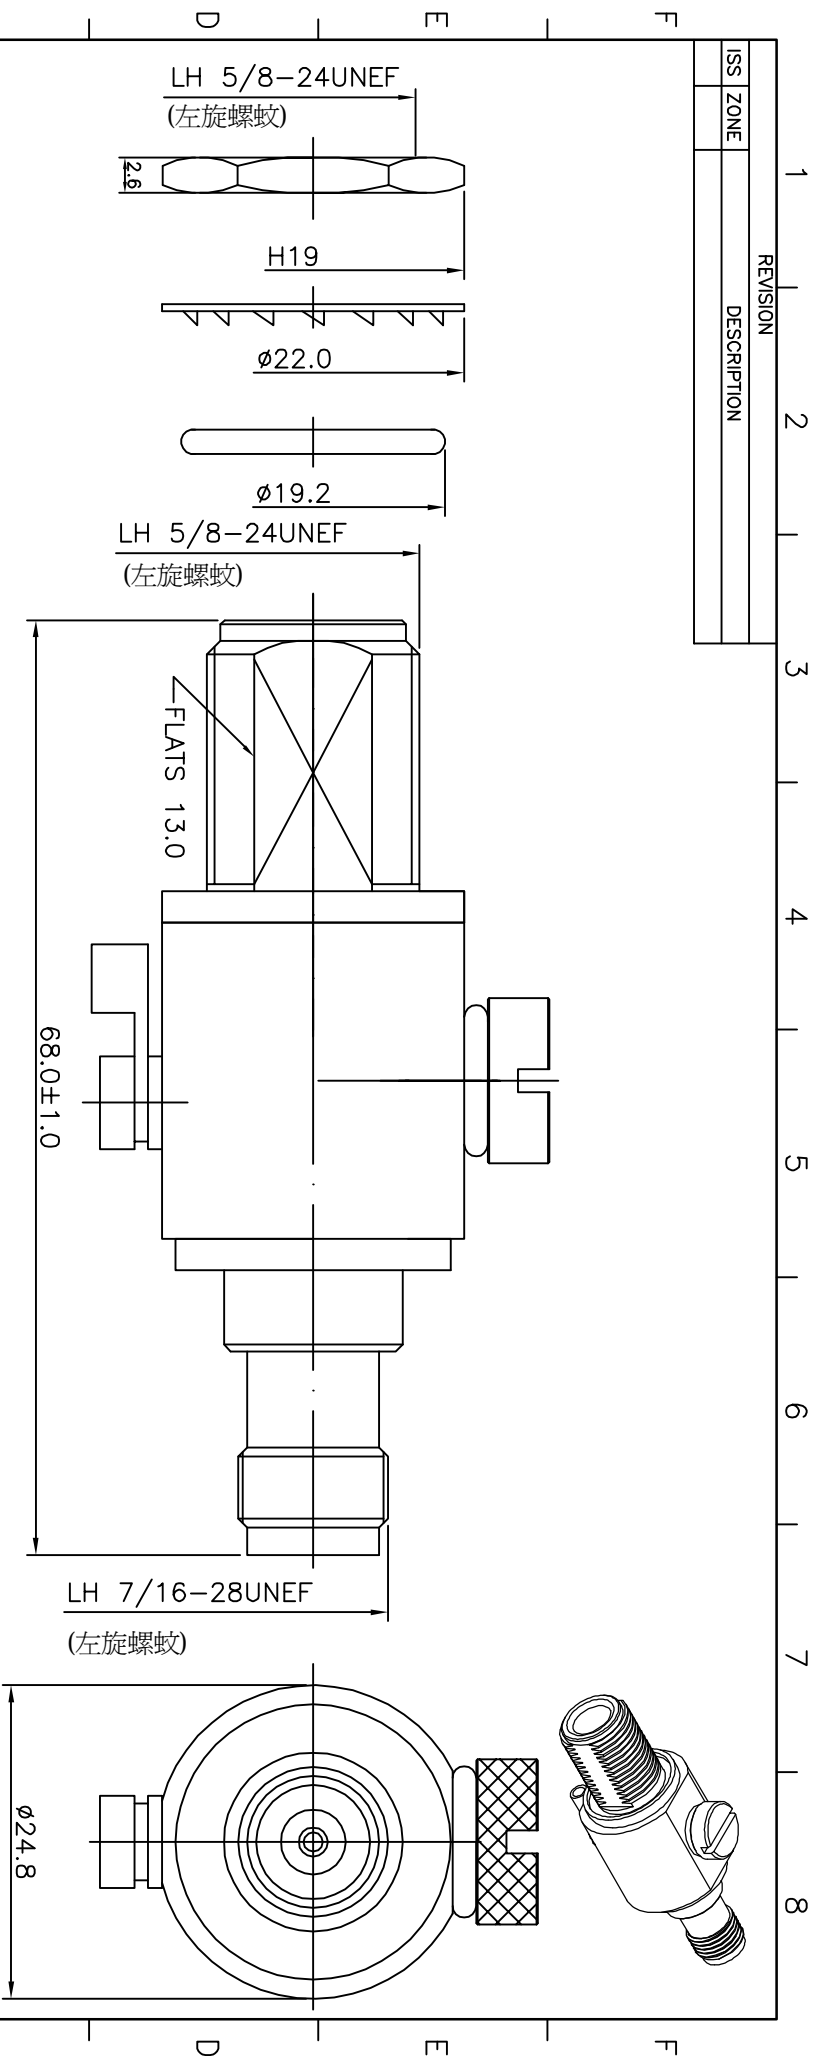

19	SLEEVE	SUS 304	NONE	1	M-0374
18	BODY	BRASS	NICKEL	1	B-0699
17	NUT	BRASS	NICKEL	1	M-0248
16	WASHER	BRASS	NICKEL	1	M-0371
15	WASHER	BRASS	NICKEL	1	M-0330
14	INSULATOR B	TEFLON	NONE	1	T-0476
13	PIN	BRASS	GOLD	1	C-0662
12	BODY	BRASS	NICKEL	1	B-0819
11	PIN	BRASS	GOLD	1	C-0573
10	GAS TUBE	NONE	NONE	1	O-0089
9	O-RING	SILICONE	NONE	1	R-0032
8	SLEEVE	BRASS	NICKEL	1	E-0048
7	NUT	BRASS	NICKEL	1	D-0066
6	GASKET	RUBBER	NONE	2	R-0033
5	INSULATOR	TEFLON	NONE	2	T-0403
4	BODY	BRASS	NICKEL	1	B-0818
3	GASKET	RUBBER	NONE	1	R-0006
2	WASHER	BRASS	NICKEL	1	G-0005
1	NUT	BRASS	NICKEL	1	D-0065

NOTE:
 1. Impedance: 50Ω
 2. Frequency Range : DC~6 GHz
 3. V.S.W.R. : ≤ 1.5
 4. Gas Tube DC Spark Over Voltage : 230V
 5. Gas Tube Impulse Discharge Current (Wave 8/20 us)
 10 Times (5 Times Each Polarity) : 10KA

TOLERANCES
 DIMENSIONS ARE IN MILLIMETER
 UNLESS OTHERWISE SPECIFIED

.X
 .XX
 .XXX
 ANGLES

±0.2
 ±0.1
 ±0.05
 ±5°

TITLE	N JACK TO TNC JACK LIGHTNING PROTECTOR
PART NO.	95-38-2-50Ω
DRAWN NO.	95-0049
APPROVED	CHECKED
DATE	DATE
DRAWN	DATE



1 2 3 4 5 6 7 8